

PoE 4Port, Uplink 1port

WG-SH504




→ 제품특징

- PoE 4Port / Uplink 1port
- 모든 포트 Gigabit 통신
- PoE 최대 60W
- PoE 와치독 (자동복구) . Hi-PoE (60W) 지원

→ 외관도

단위: mm

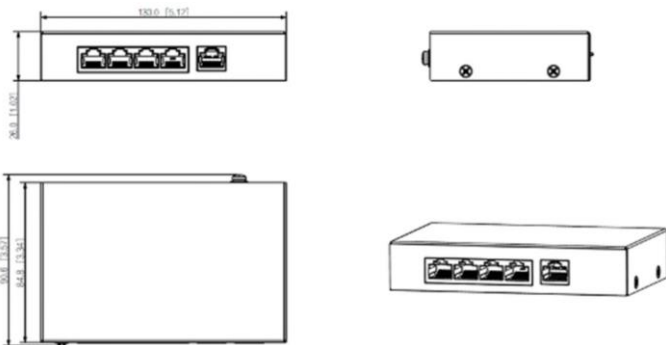

→ 주요사항

Hardware Feature	
Ethernet Port	Port 1-8: 8 × RJ-45 10/100/1000 Mbps (PoE) Port 9: 1 × RJ-45 10/100/1000 Mbps (Uplink)
PoE Power Consumption	Port1 ≤ 60 W max (Hi-PoE) Port2-8 ≤ 30 W max Total ≤ 120 W
Power Consumption	Idling: 3 W Full load: 120 W max
Ethernet Port	IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3x
PoE	
PoE Standard	IEEE802.3af; IEEE802.3at; Hi-PoE; IEEE802.3bt
PoE Pin Assignment	1, 2, 4, 5 (V+), 3, 6, 7, 8 (V-)
Long Distance PoE	100 m long distance PoE transmission
PoE Power Management	Yes
PoE Watchdog	Yes
Performance	
Switching Capacity	20 Gbps
Packet Forwarding Rate	14.88 Mbps
Packet Buffer Memory	1.5 Mbit
MAC Address Table	4 K
Jumbo Frame	9KByte
Working Temperature	-10 °C to 55 °C (+14°F to +131°F)
Operating Humidity	5%~95% (RH)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Performance	
Power Input	48 V - 57 V DC
Lighting Protection	Common mode: 8 kV / Differential mode: 4 kV
ESD Protection	Air discharge: 15 kV / Contact discharge: 10 kV
Weight	0.50 kg
Dimension	190 mm × 100 mm × 30 mm